



Read and understand all instruction, warning and danger labels.


Lea el manual de operación anexo sobre ensamblaje e inicio.

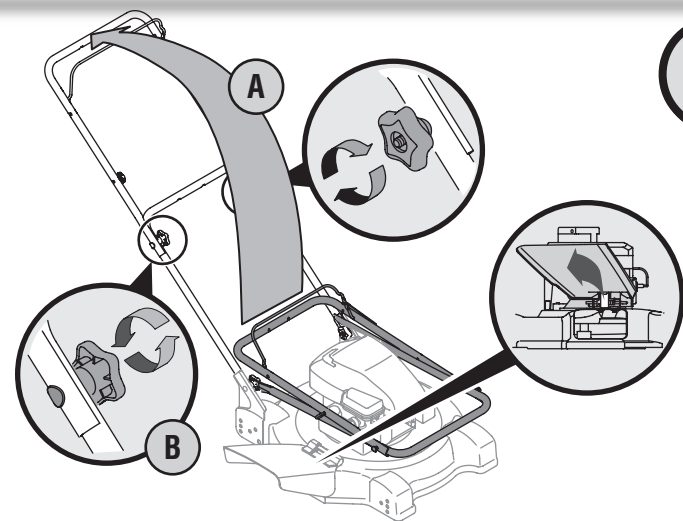


Lift handle to extended position. Tighten wing knobs.
Remove retainer clip from chute deflector.

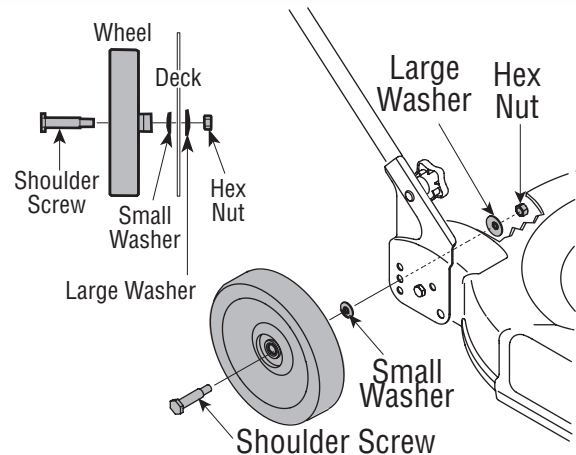


Secure rear wheels to deck as shown. Be sure to
place cupped side of washer against deck.
Secure front wheels in same manner.

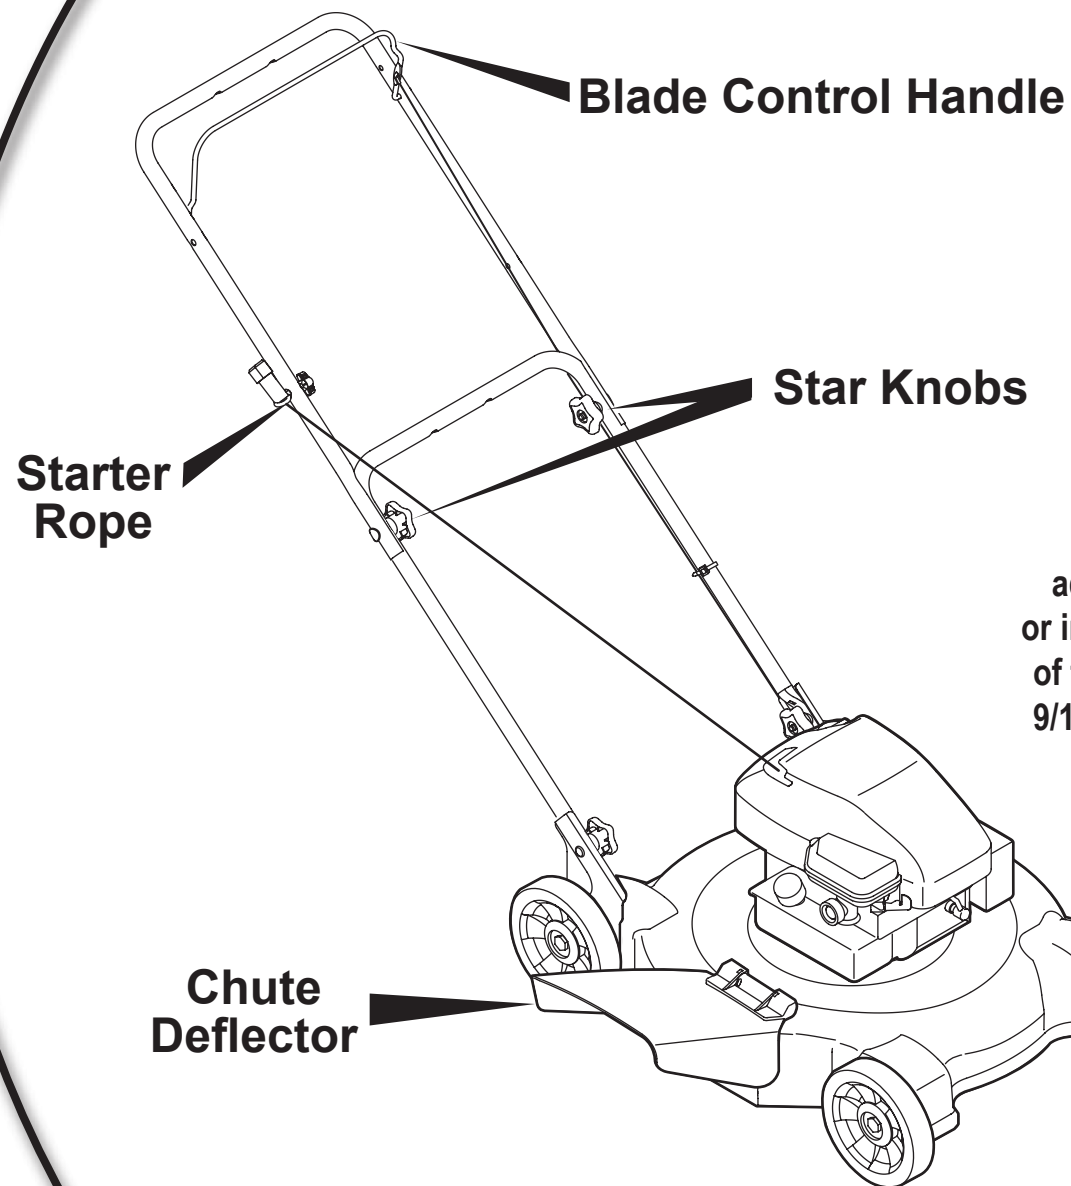

Tools Required for
Assembly: A set of
adjustable wrenches
or individual wrenches
of the following sizes:
9/16-inch and 3/4-inch

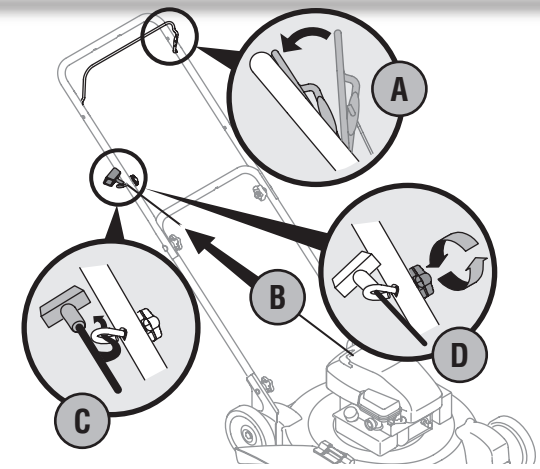

Hold blade control handle against upper handle.
Slowly slip starter rope into rope guide.
Tighten rope guide wing knob.

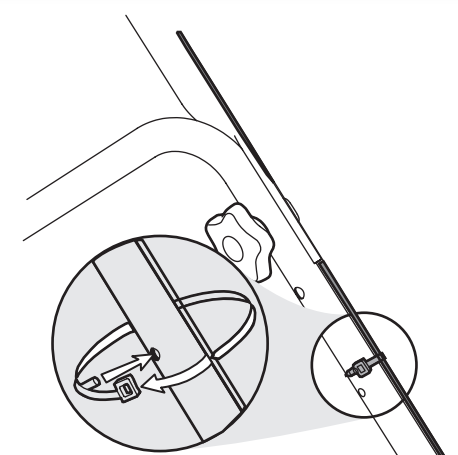

Secure cable to lower handle with
cable tie provided with unit.



FAST START


GUIDE

FAST START

GUIDE

Read and understand all instruction, warning and danger labels.

Lea el manual de operación anexo sobre ensamblaje e inicio.



5


Fill tank with gas to within 1/2 inch of top of tank.



6

Fill engine with entire contents of oil bottle supplied with your mower.

5x




Push primer five times.

7

Oil Fill

Gas Cap


Primer

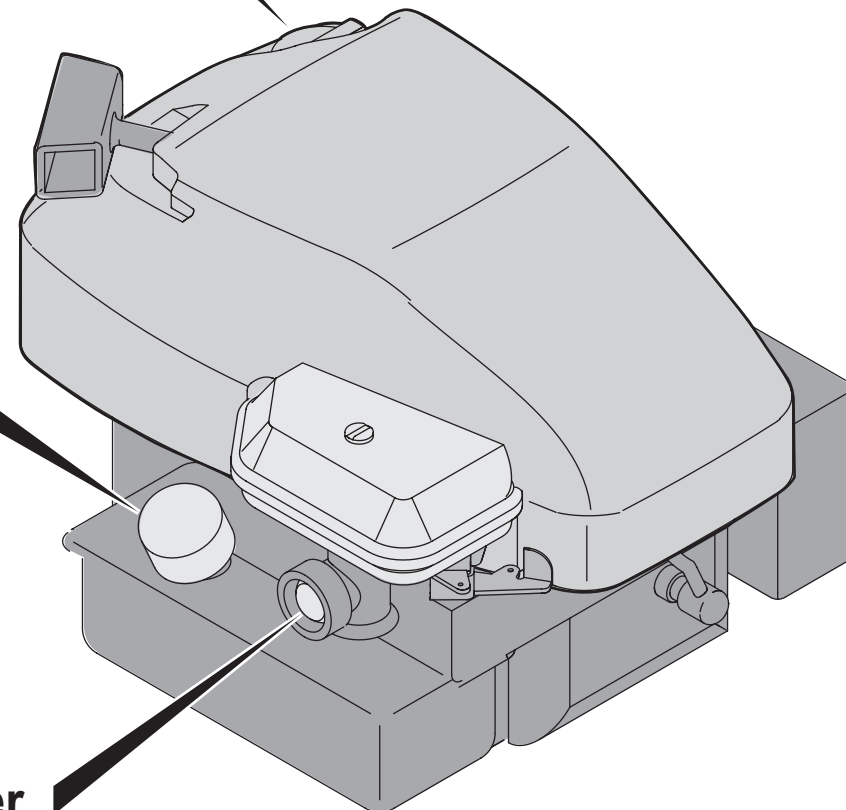

Need Help?

Call 1-888-TO-HELP-U
(1-888-864-3578)

8

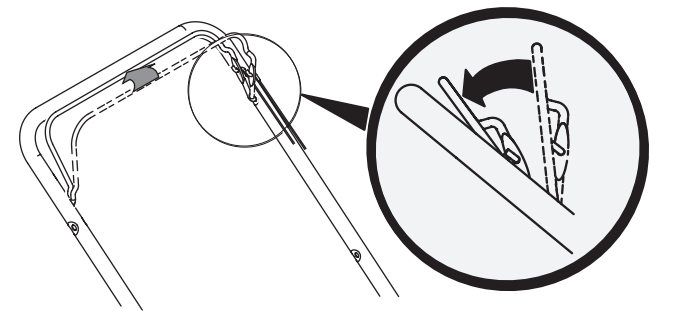

Depress blade control handle and hold.



9

Pull starter rope with quick, full arm stroke.
If engine does not start after five pulls,
repeat steps seven thru nine.



IMPORTANT: READ OPERATOR'S MANUAL THOROUGHLY AND FOLLOW THE SAFE OPERATION PRACTICES BEFORE OPERATING .

